
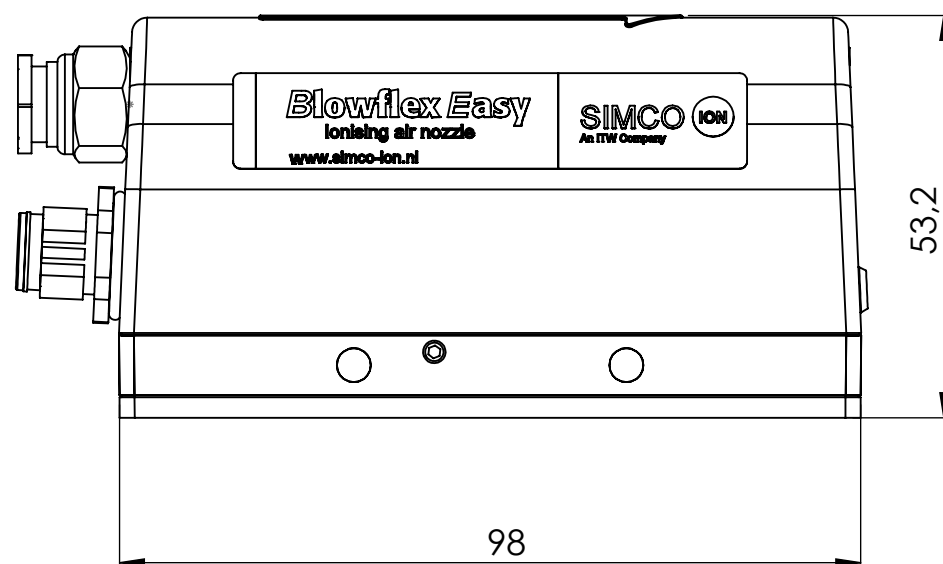





Simco offers Blowflex Easy devices with nozzles for a wide range of applications. If there is no suitable device, you can assemble your own combination of Blowflex Easy Basic and a suitable nozzle. The Blowflex Easy Basic has a 1/4" BSP air outlet.

Drawing 16160010 shows all mounting variations of the Blowflex Easy.


Drawing 16160020 shows the power connection variations.

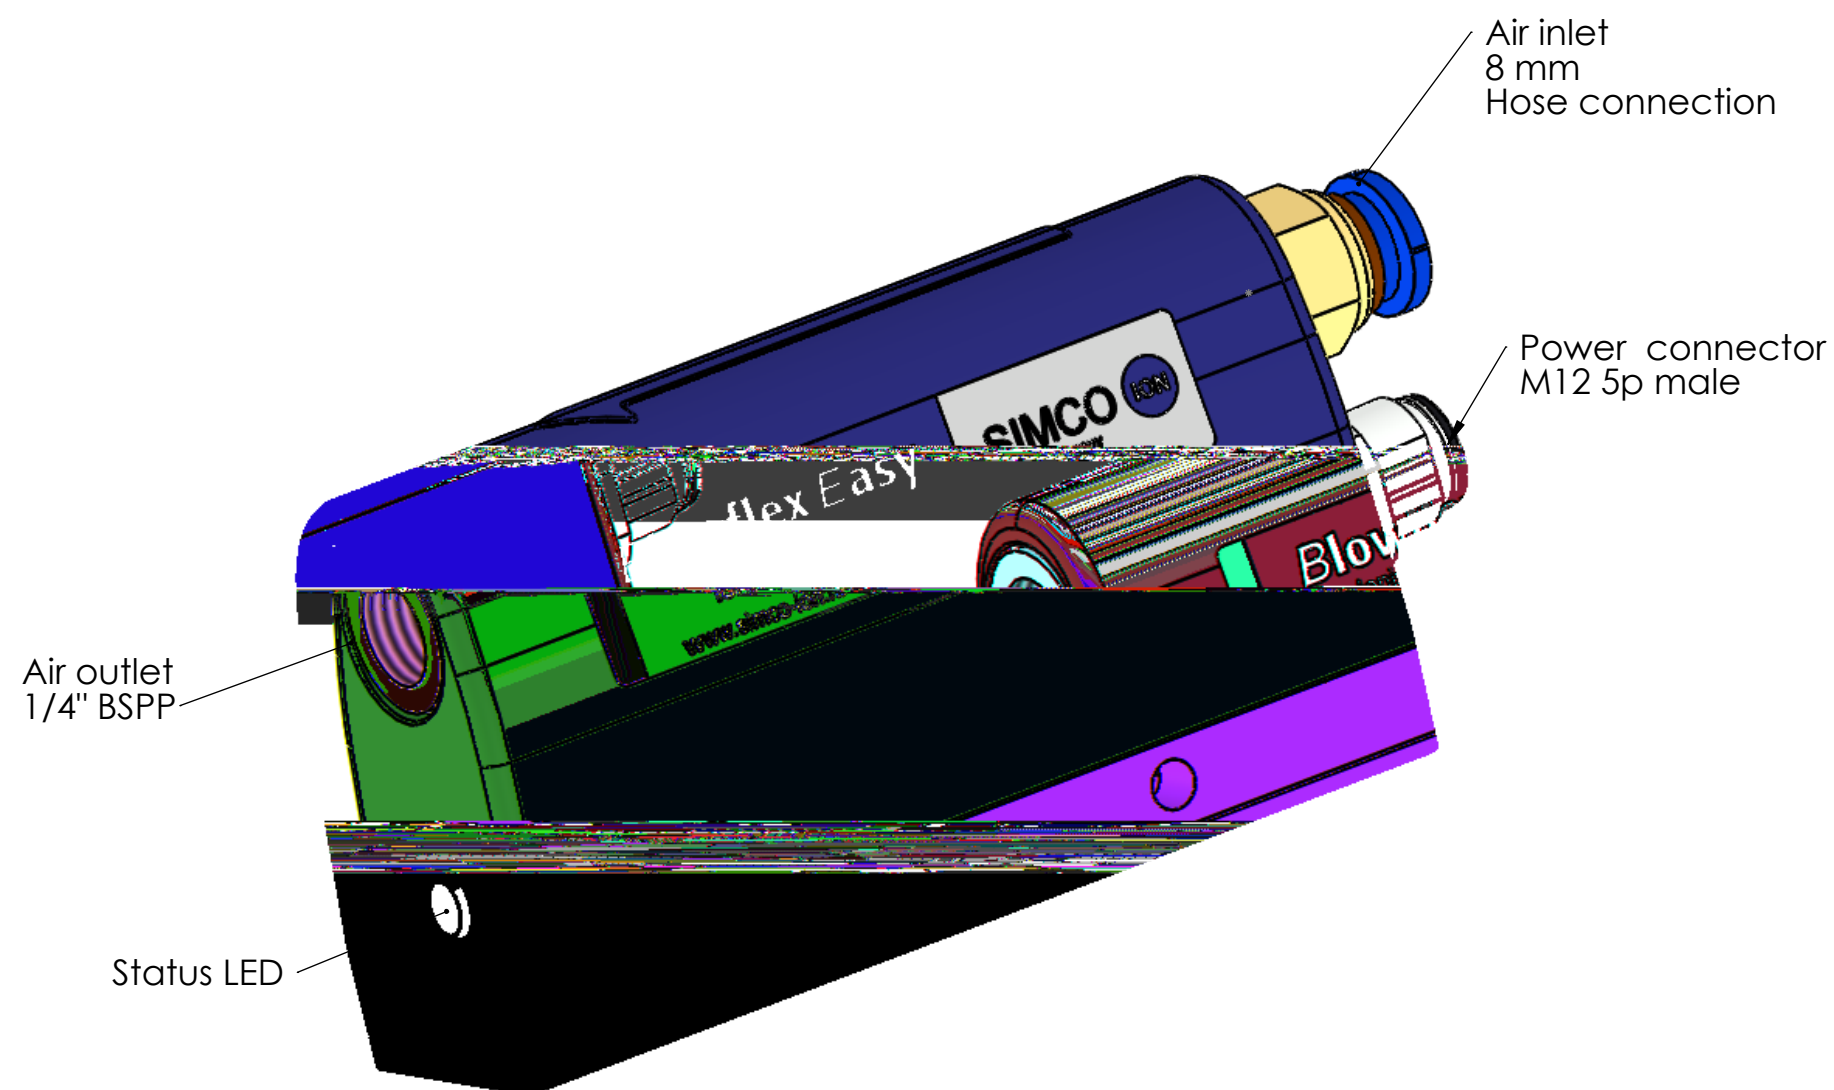

|                                                                                                                        |                                   |                     |                  |    |        |                                                                                       |           |                      |                      |
|------------------------------------------------------------------------------------------------------------------------|-----------------------------------|---------------------|------------------|----|--------|---------------------------------------------------------------------------------------|-----------|----------------------|----------------------|
| <div><div><div>SIMCO ION™</div><div>An ITW Company</div><div>WWW.SIMCO-ION.NL TEL: +31 (0)573 288333</div></div></div> | Name: Blowflex Easy Basic         |                     |                  |    |        |                                                                                       | Drawn: RJ | Part no.: 1616000000 |                      |
|                                                                                                                        | CAD GENERATED<br>NOT AUTO UPDATED | Dimensions<br>in mm | Date: 24-12-2020 | A3 | M: 1:1 |  | ECN-1616  | Check: HS            | Dwg. no.: 16160000/- |

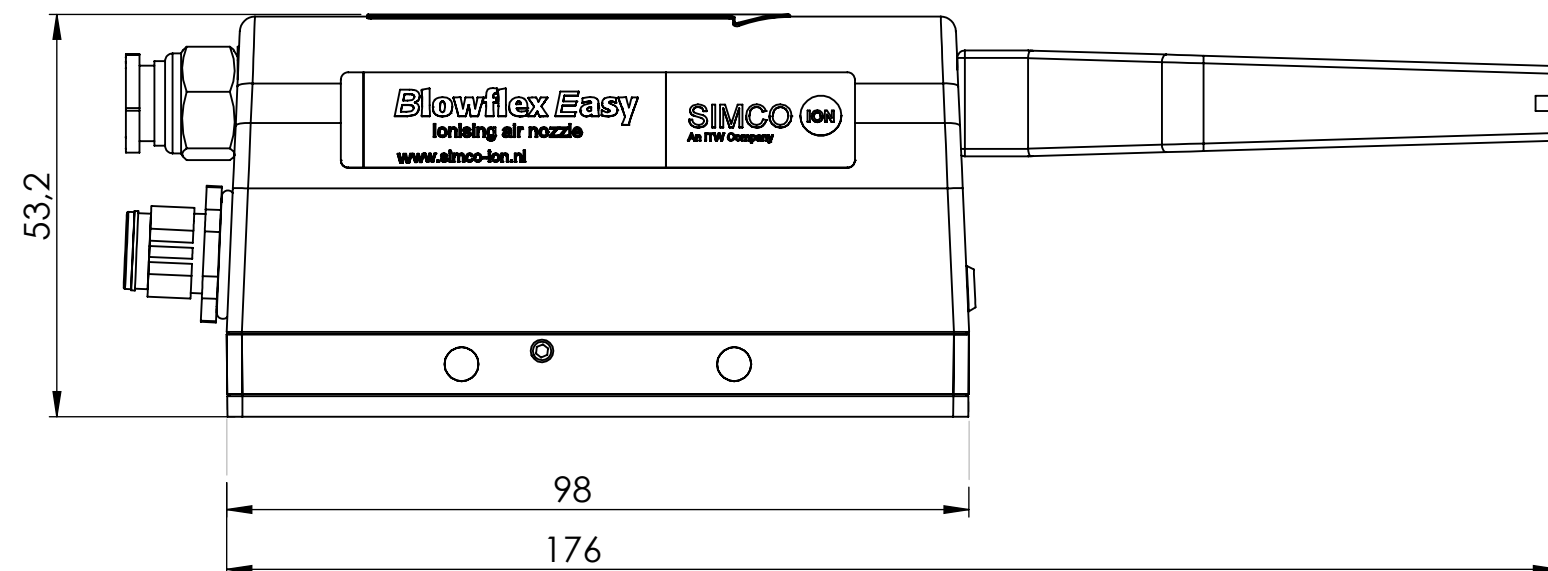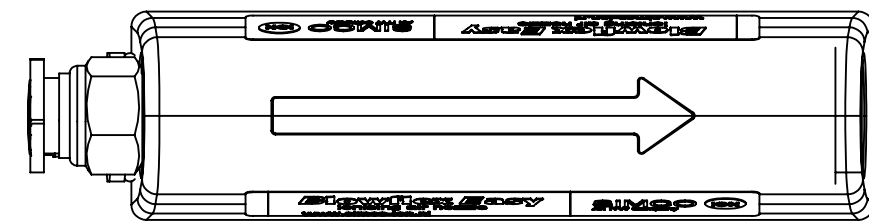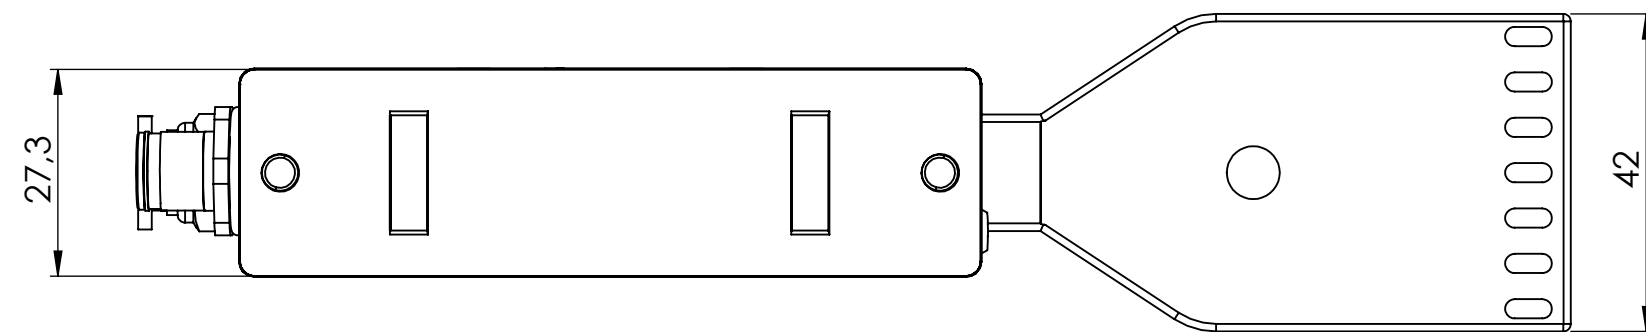



Air outlet  
Flat nozzle

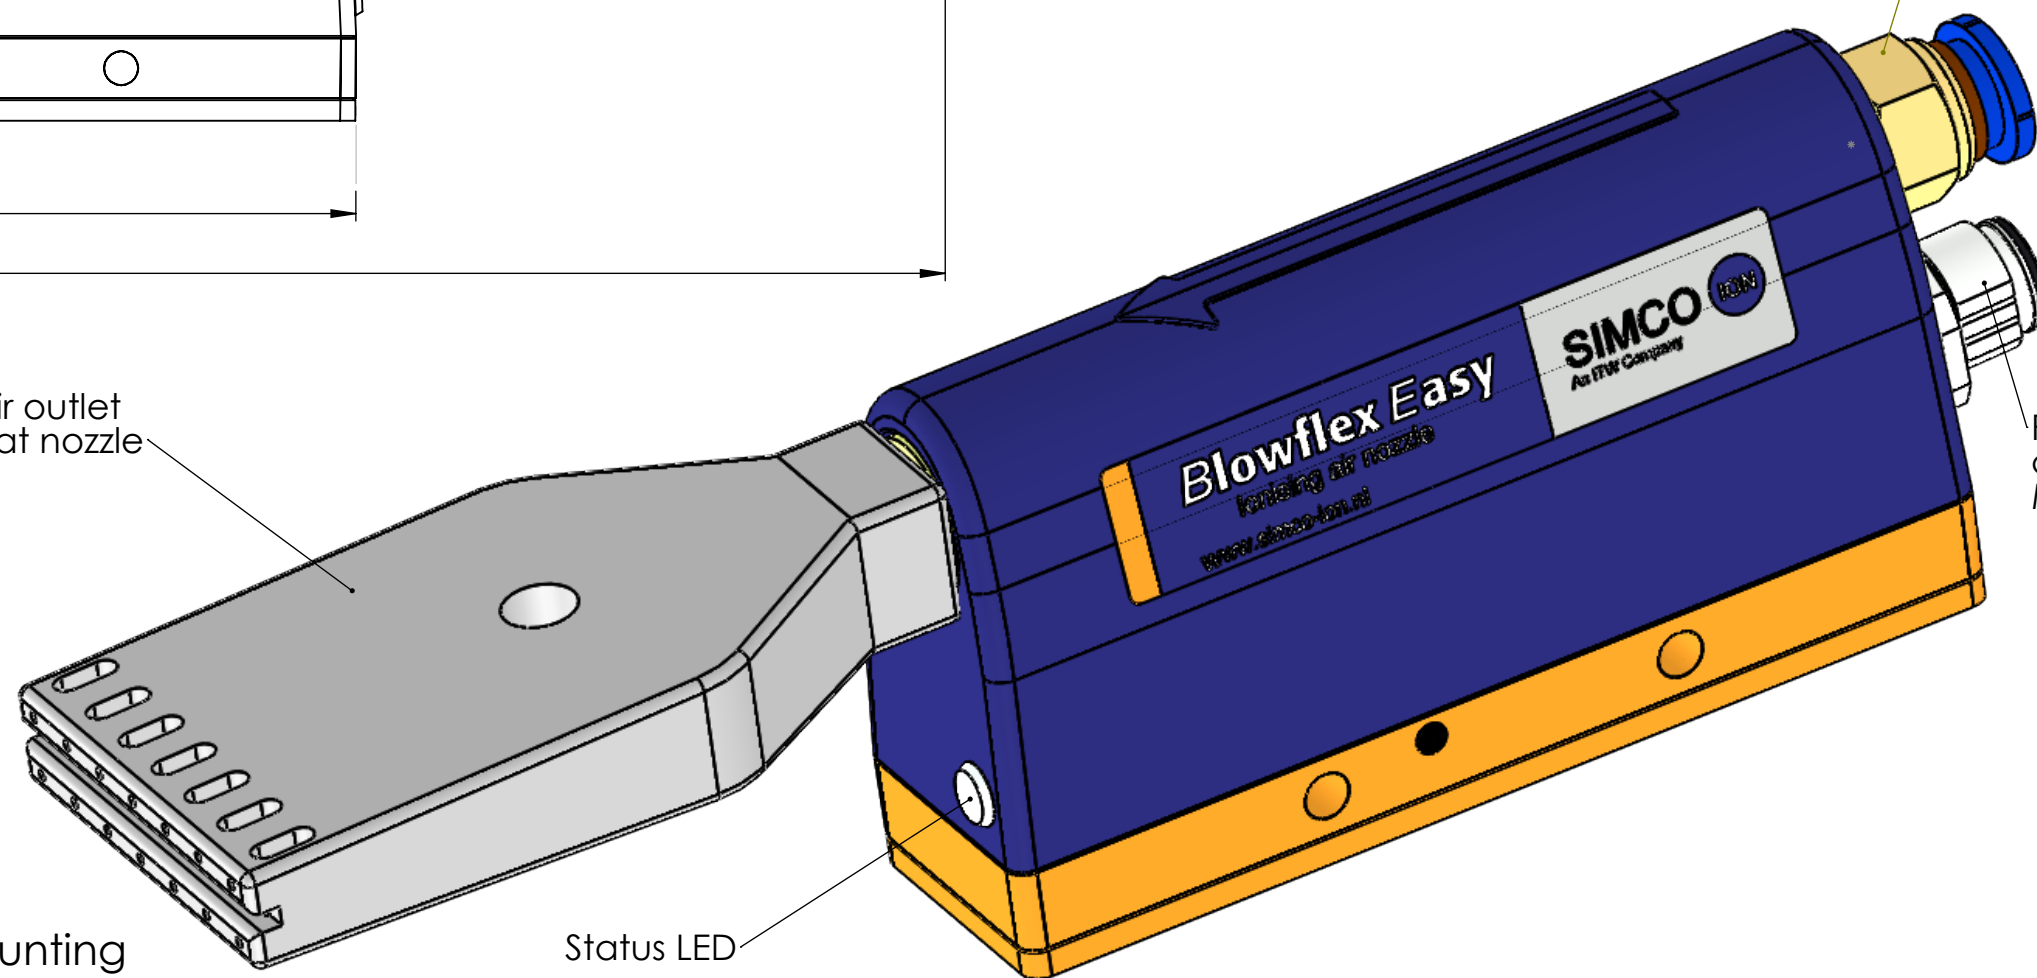

Drawing 16160010 shows all mounting variations of the Blowflex Easy.

Drawing 16160020 shows the power connection variations.

|                                                                                                                                    |  |                                 |                  |    |        |                                                                                       |          |           |                      |     |
|------------------------------------------------------------------------------------------------------------------------------------|--|---------------------------------|------------------|----|--------|---------------------------------------------------------------------------------------|----------|-----------|----------------------|-----|
| <div><div><div>SIMCO ION<sup>TM</sup></div><div>An ITW Company</div><div>WWW.SIMCO-ION.NL TEL: +31 (0)573 288333</div></div></div> |  | Name: Blowflex Easy Flat nozzle |                  |    |        |                                                                                       |          | Drawn: RJ | Part no.: 1616000003 |     |
| CAD GENERATED<br>NOT AUTO UPDATED                                                                                                  |  | Dimensions<br>in mm             | Date: 30-12-2020 | A3 | M: 1:1 |  | ECN-1616 | Check: HS | Dwg. no.: 16160003/- | 1/1 |

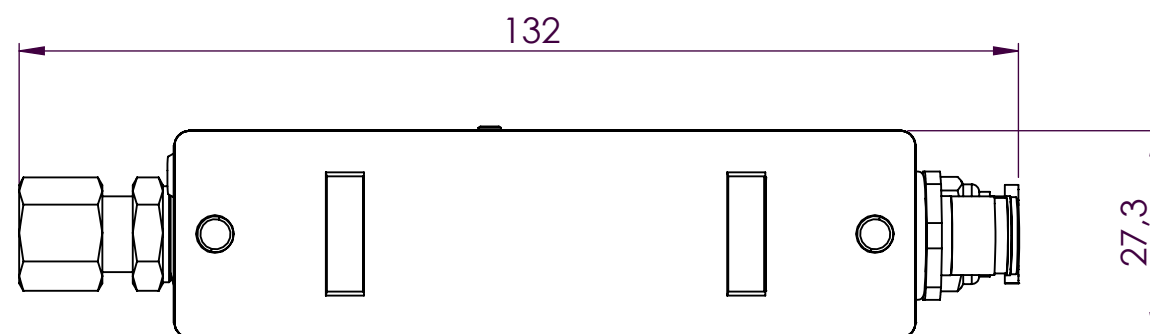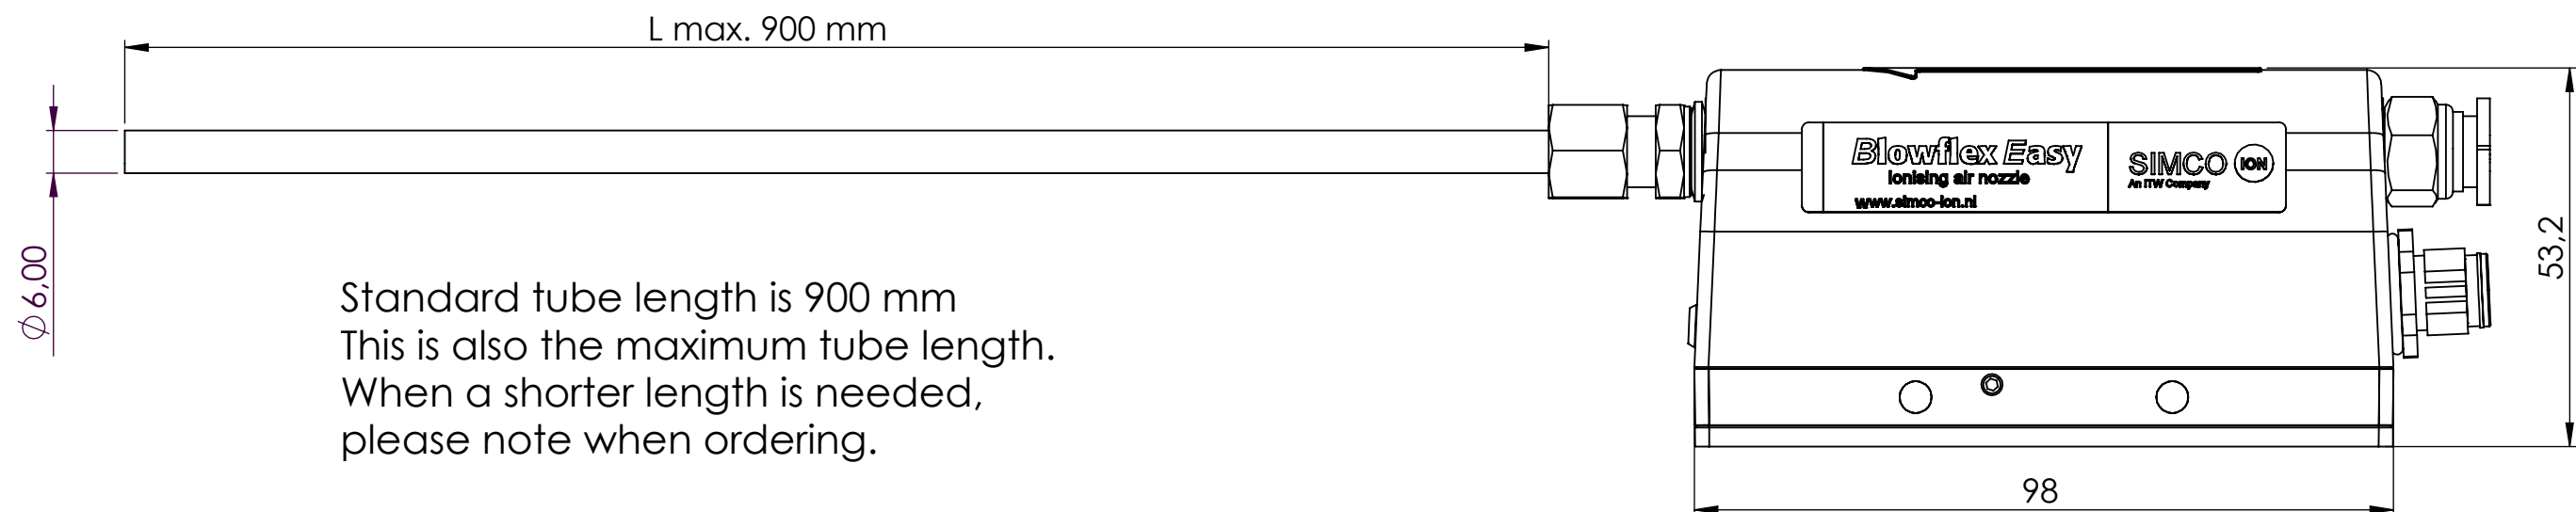


Air outlet  
1/4" Stainless tube  
max. 900 mm



Air inlet  
8 mm  
Hose connection

Power  
connector  
M12 5p male


Drawing 16160010 shows all mounting  
variations of the Blowflex Easy.

Drawing 16160020 shows the power  
connection variations.

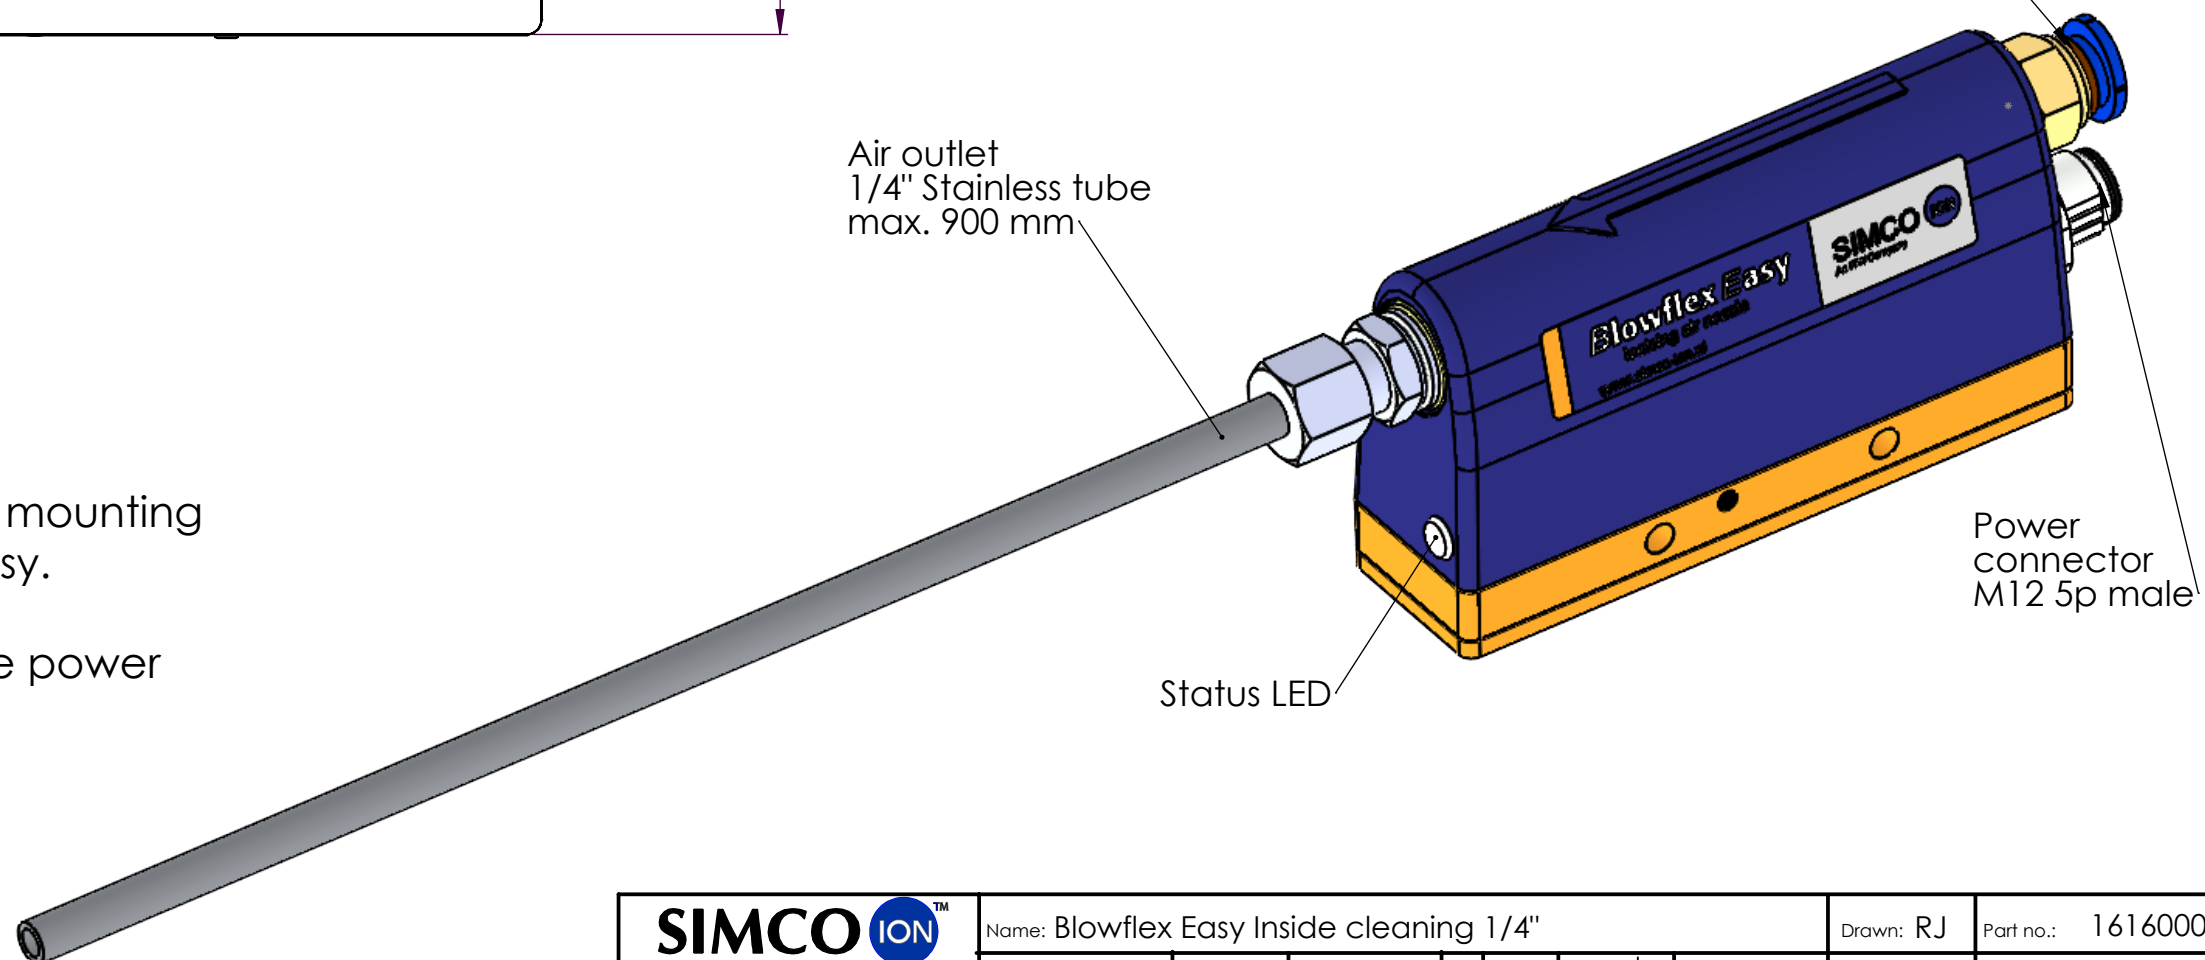

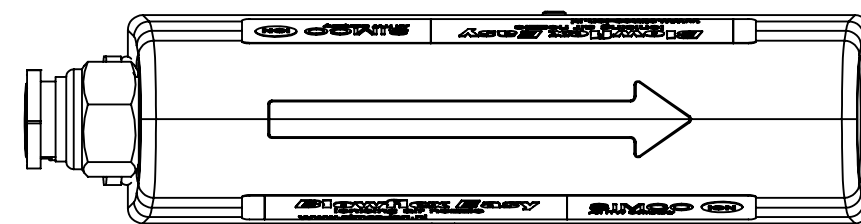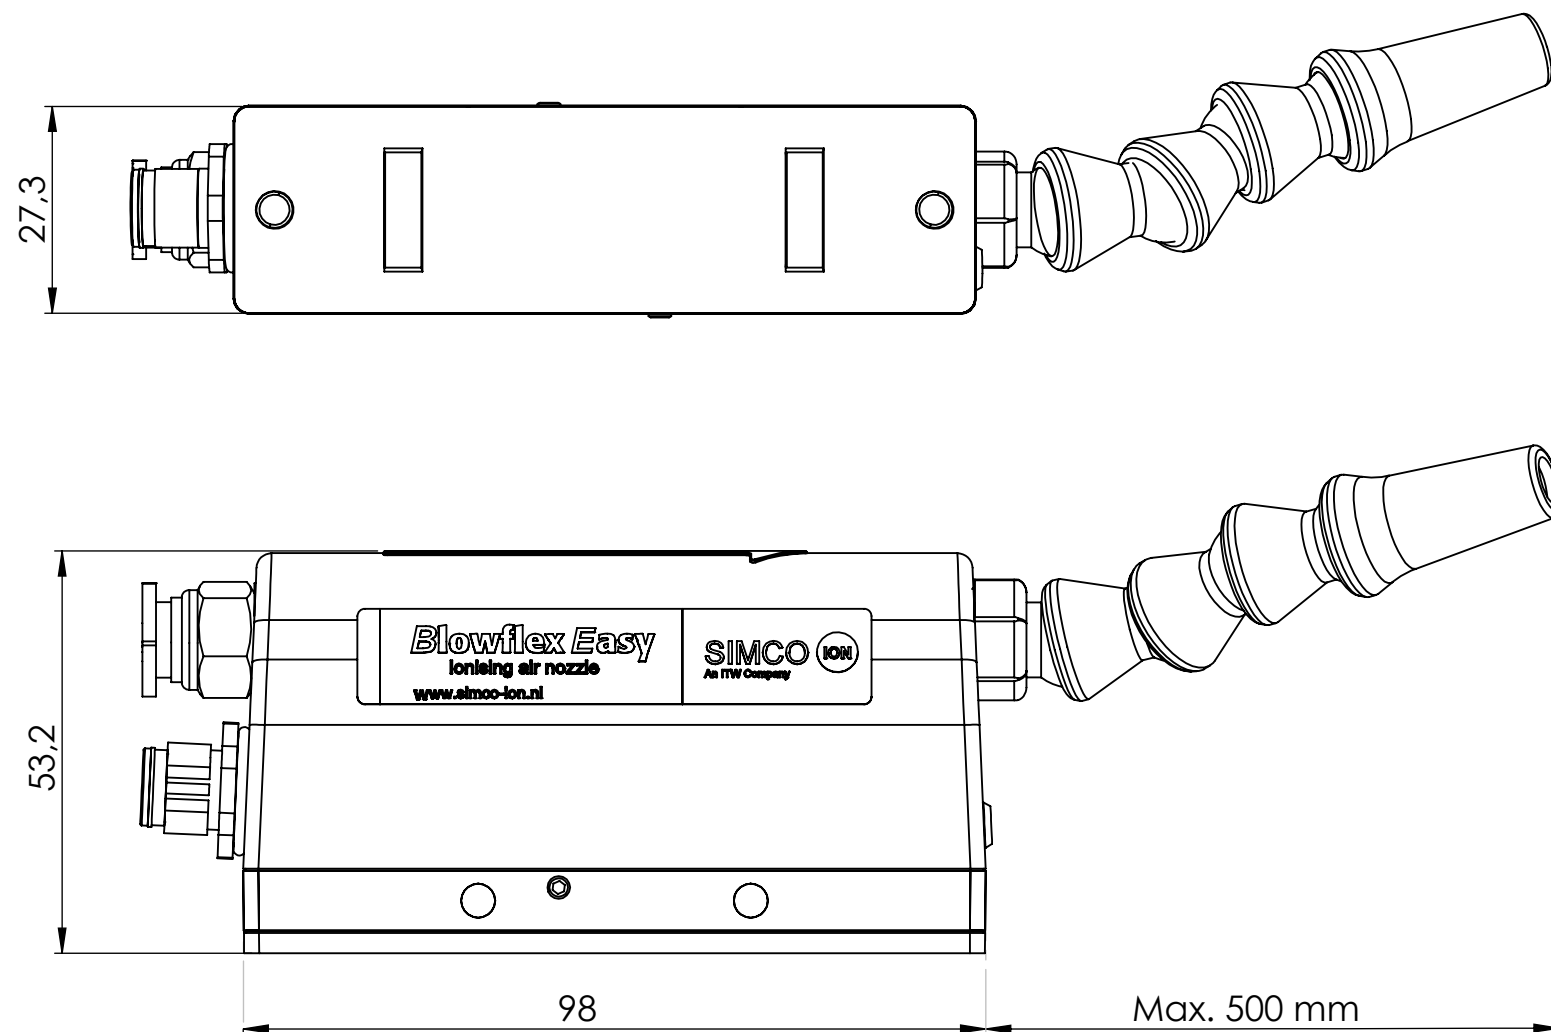




The Flexline air outlet parts are not supplied by Simco, you can find parts at [www.loc-line.com](http://www.loc-line.com).  
Order the Blowflex Easy Basic (1616000000) for this configuration.

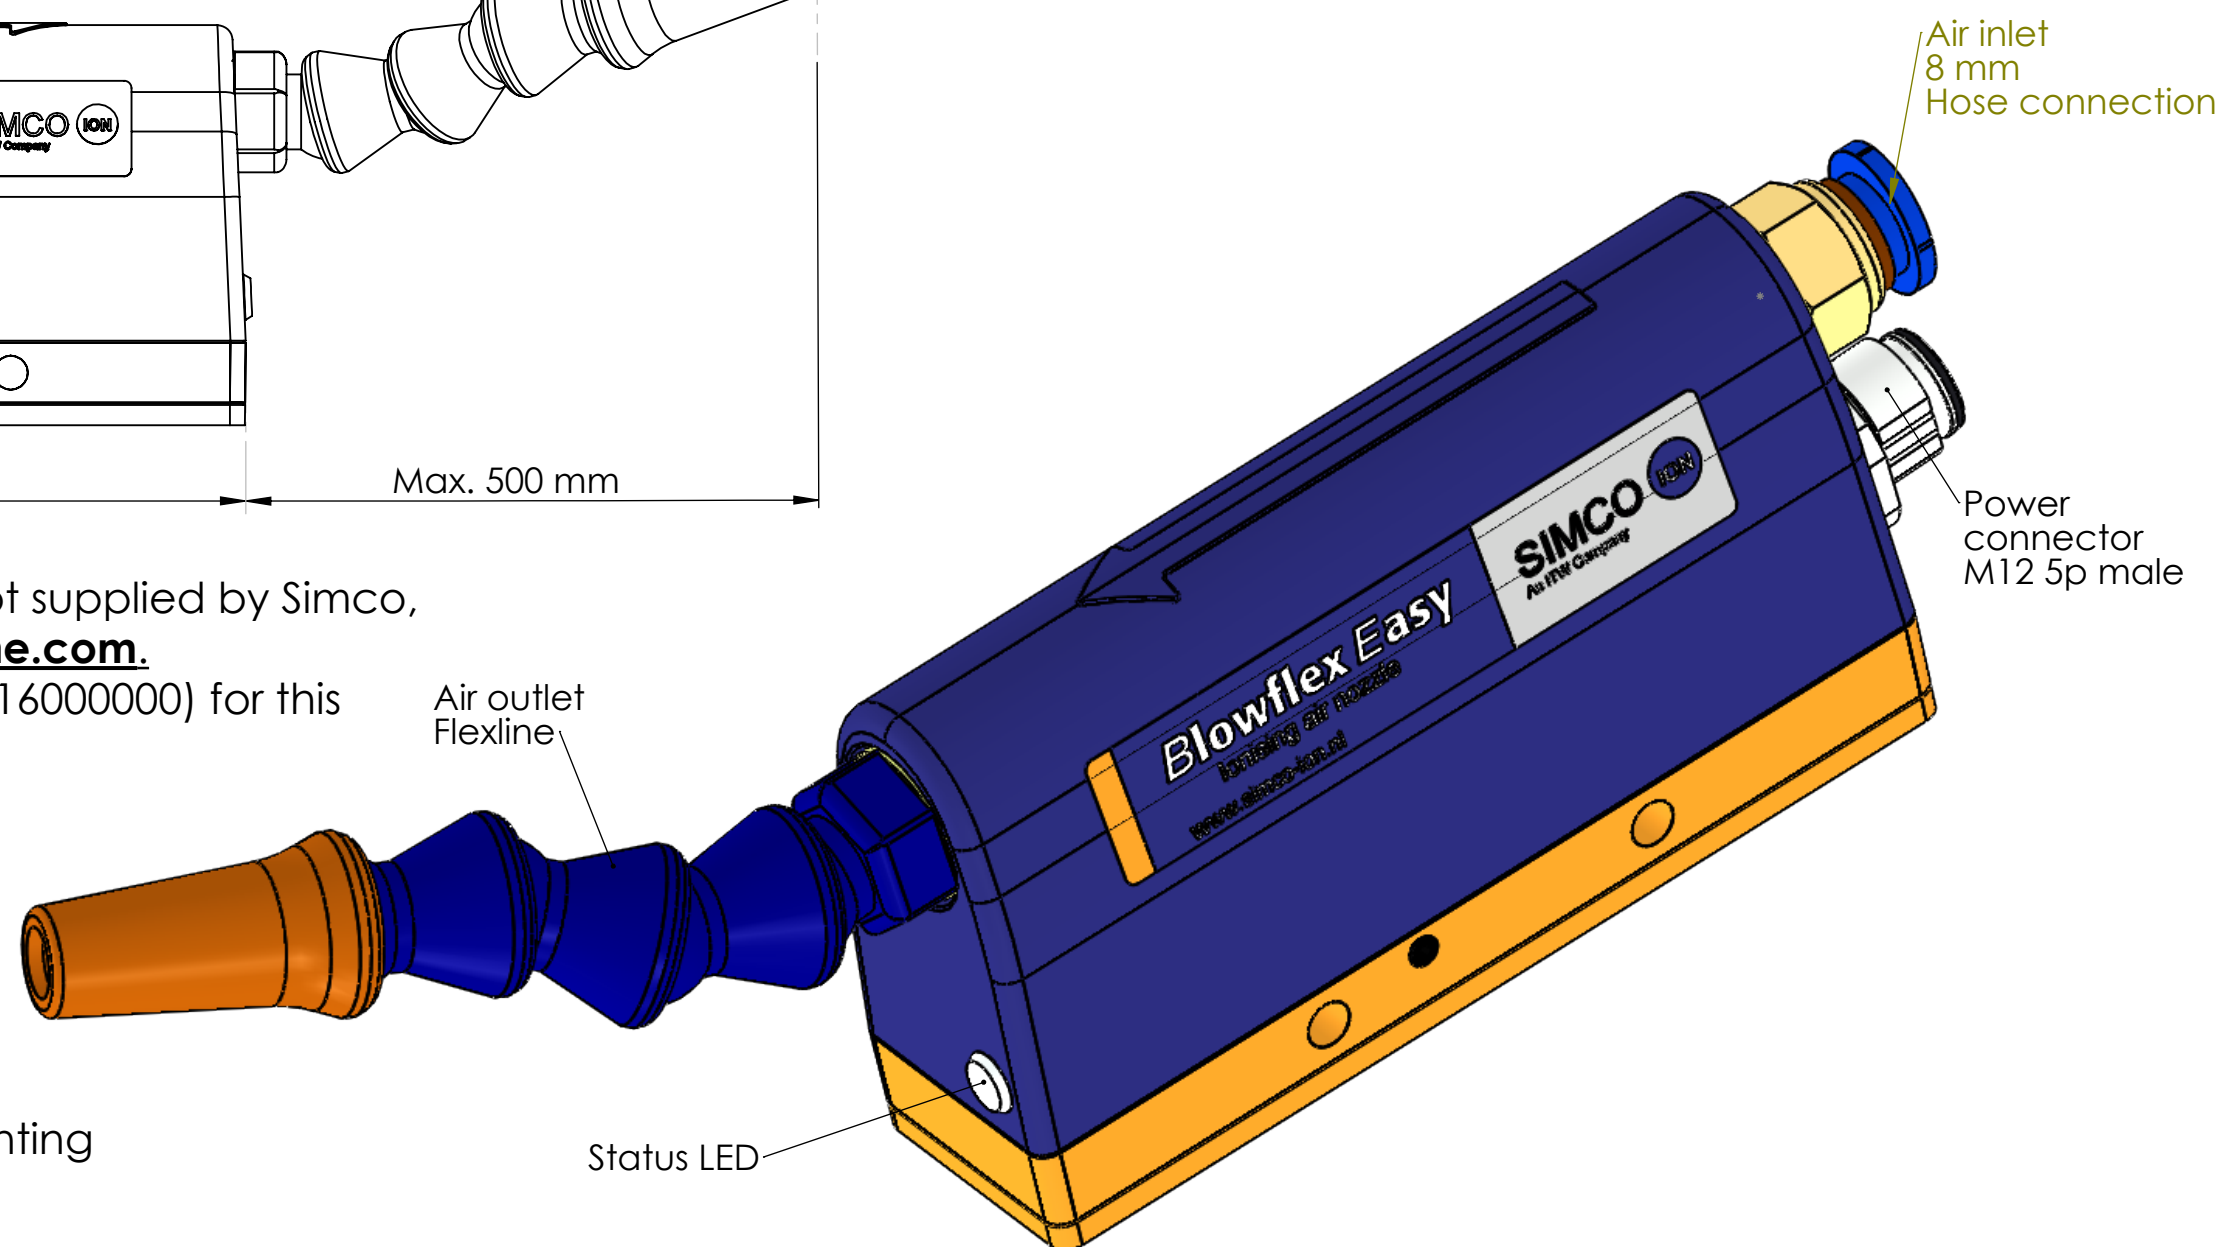


Drawing 16160010 shows all mounting variations of the Blowflex Easy.

Drawing 16160020 shows the power connections variations.

|                                                                                                                        |                                   |                     |                  |    |        |                                                                                       |           |           |                      |
|------------------------------------------------------------------------------------------------------------------------|-----------------------------------|---------------------|------------------|----|--------|---------------------------------------------------------------------------------------|-----------|-----------|----------------------|
| <div><div><div>SIMCO ION™</div><div>An ITW Company</div><div>WWW.SIMCO-ION.NL TEL: +31 (0)573 288333</div></div></div> | Name: Blowflex Easy Flexline      |                     |                  |    |        |                                                                                       | Drawn: RJ | Part no.: |                      |
|                                                                                                                        | CAD GENERATED<br>NOT AUTO UPDATED | Dimensions<br>in mm | Date: 30-12-2020 | A3 | M: 1:1 |  | ECN-16156 | Check: HS | Dwg. no.: 16160007/- |

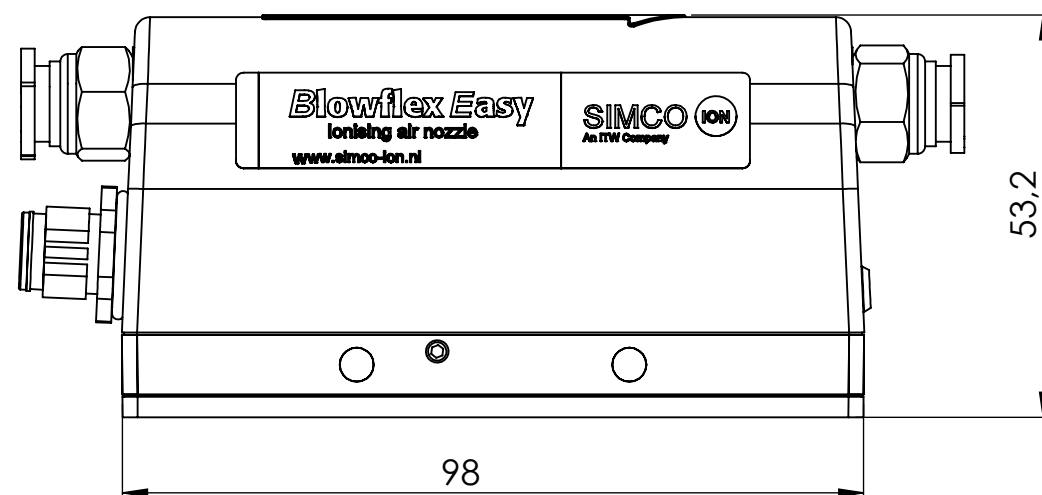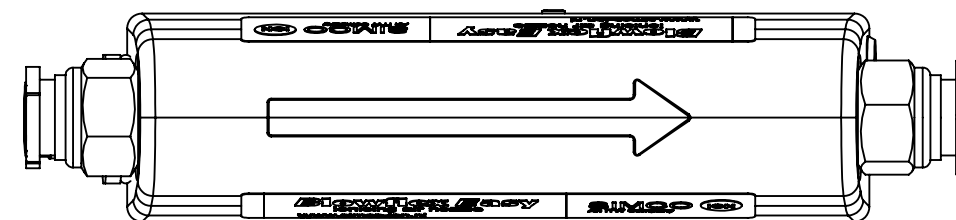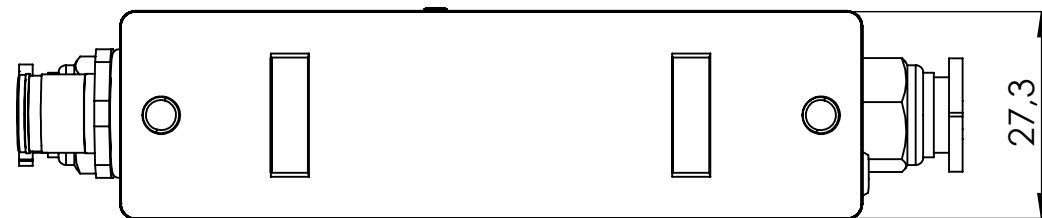


Air outlet  
8 mm  
Hose connection


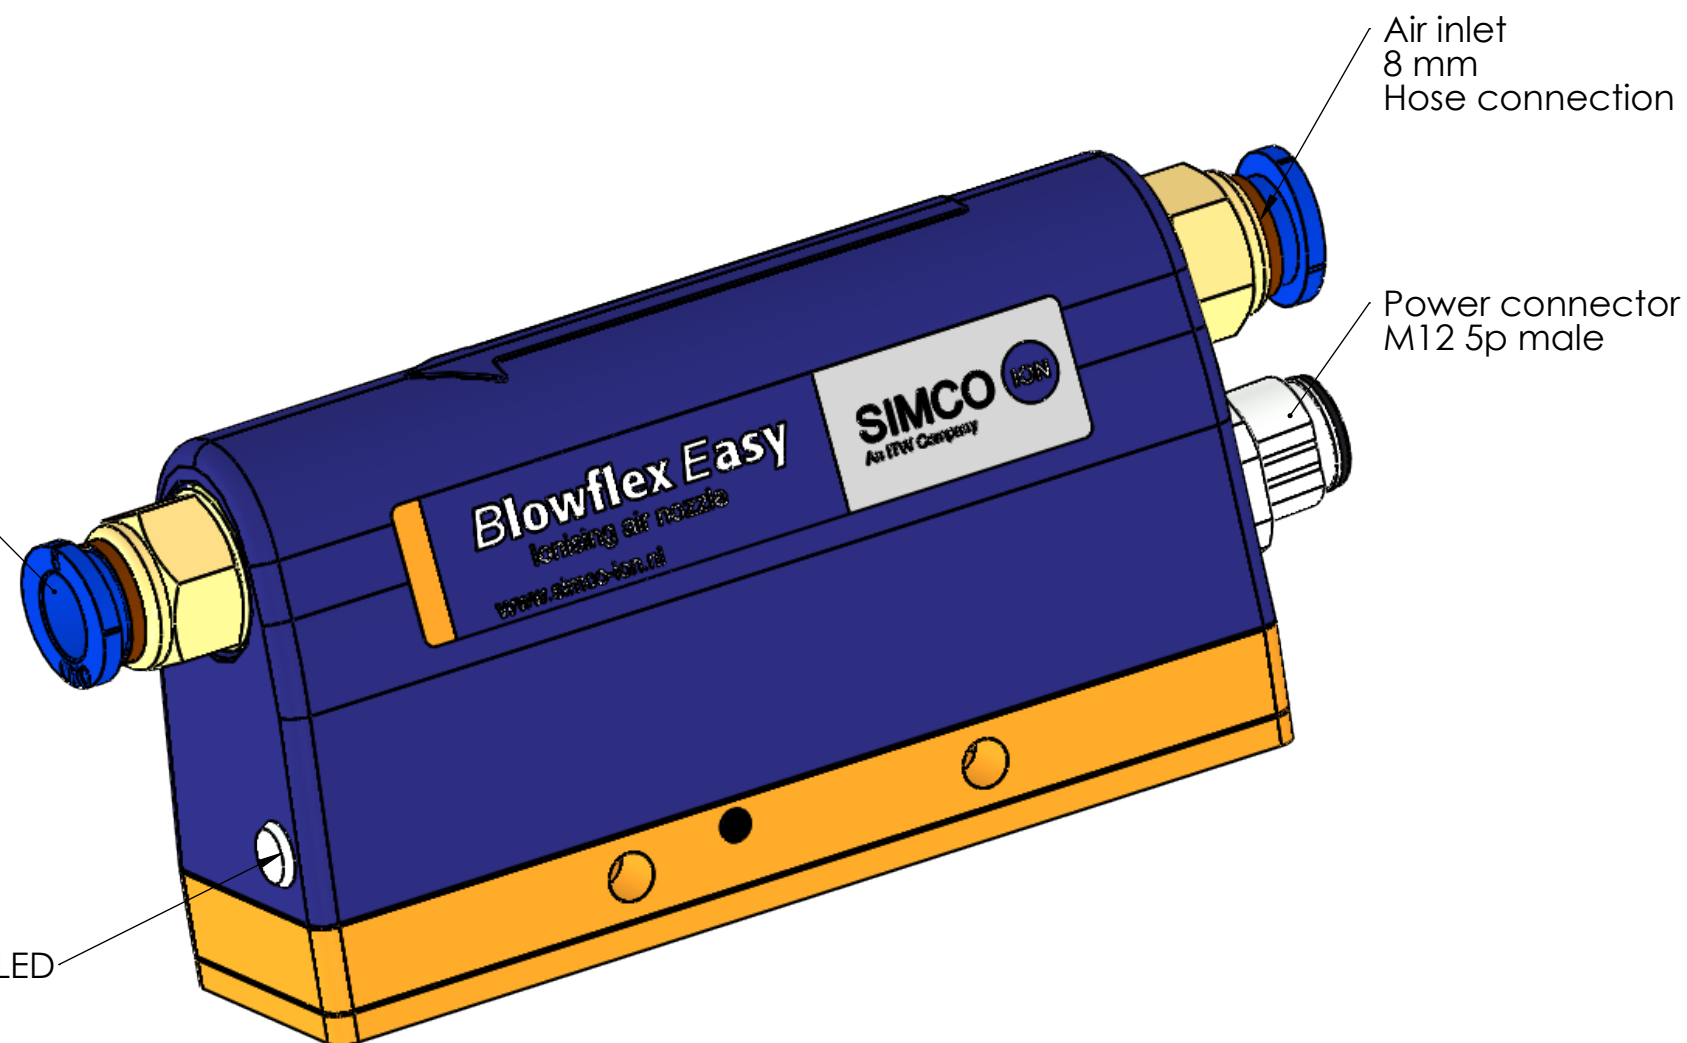


Drawing 16160010 shows all mounting variations of the Blowflex Easy.



Drawing 16160020 shows the power connection variations.

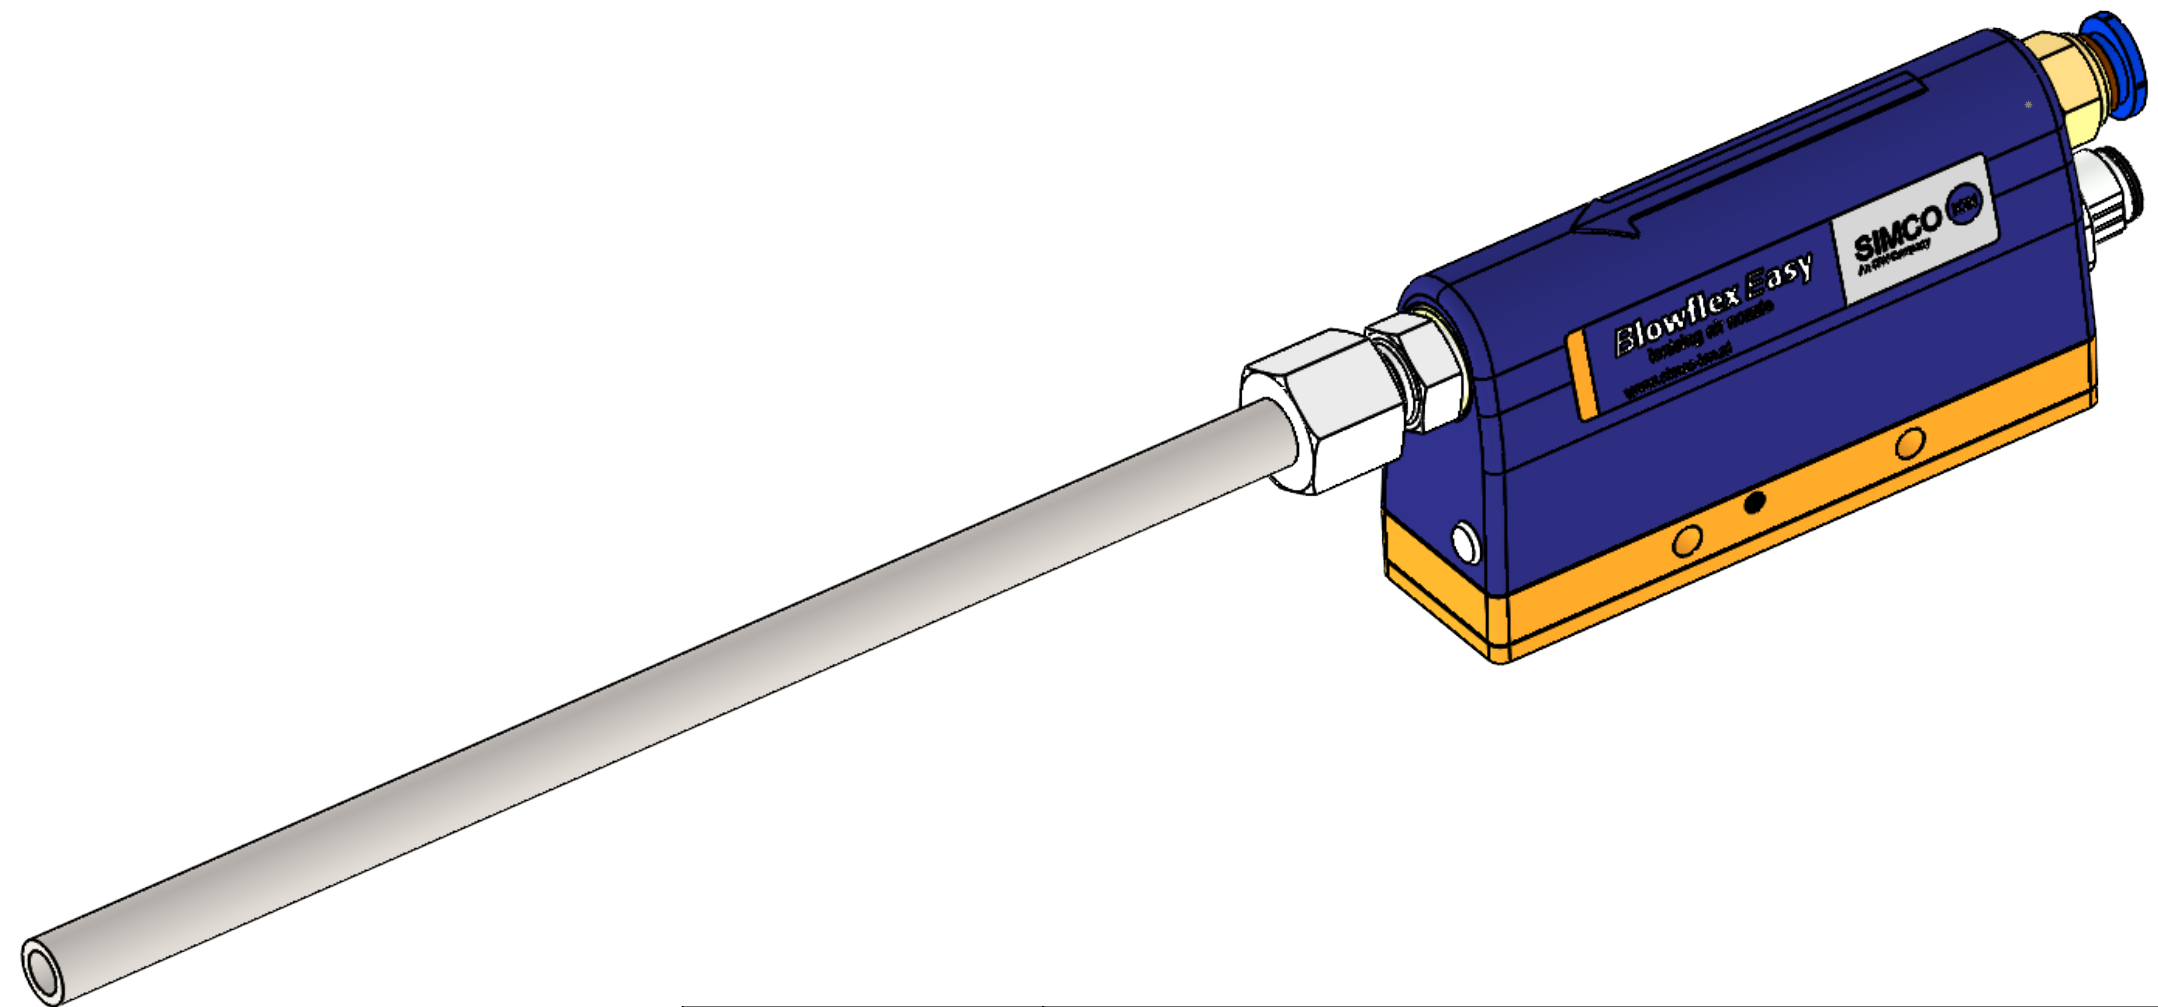



Side mounting

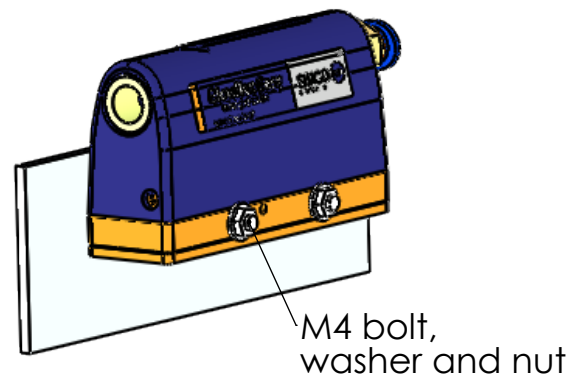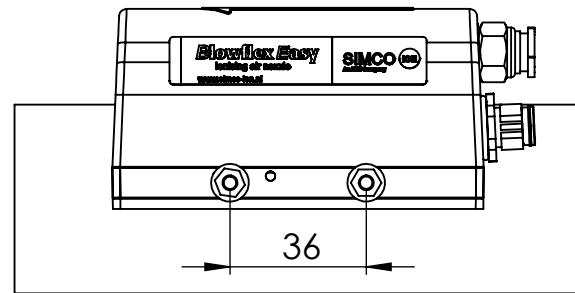



Mounting with Simco bracket wide

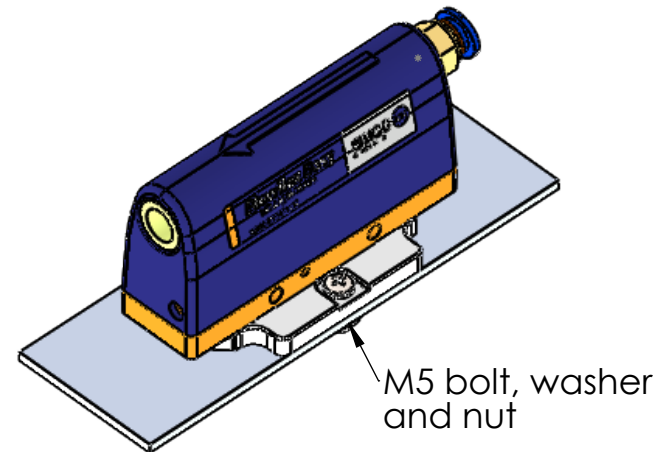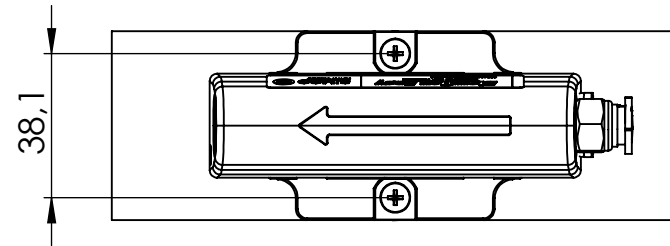


Mounting with Simco bracket small

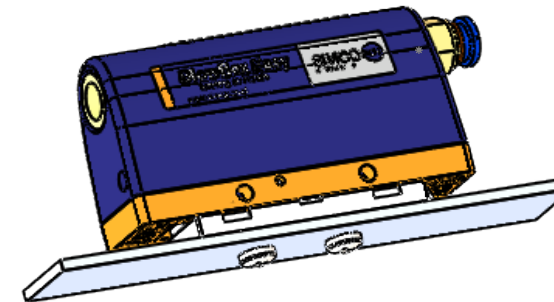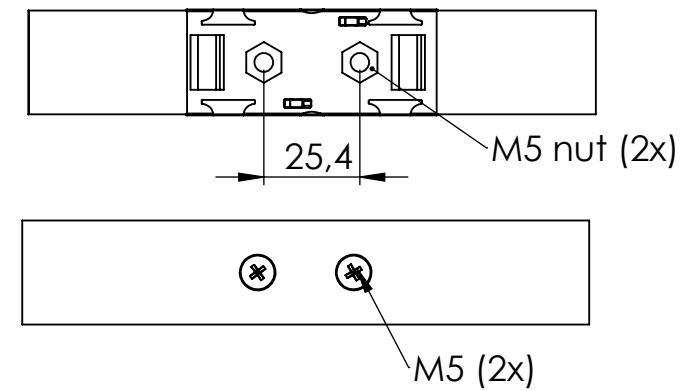


Mounting with insert threads

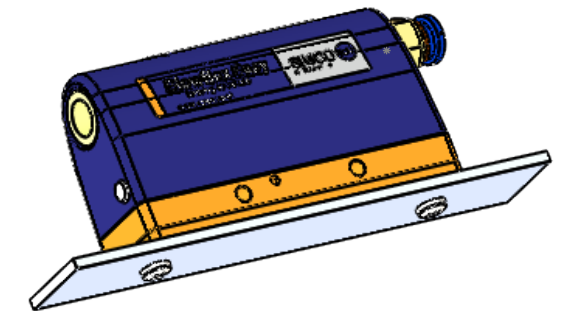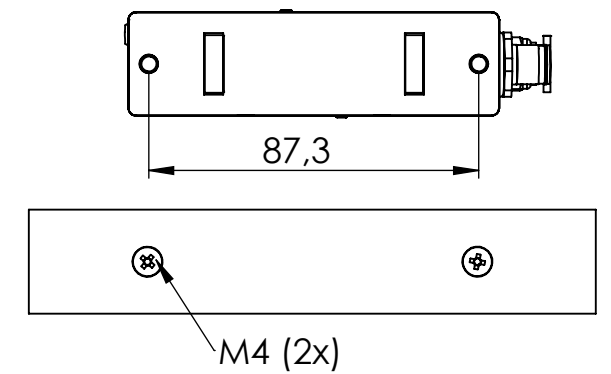


The Simco bracket has 2 removable wings for small mounting

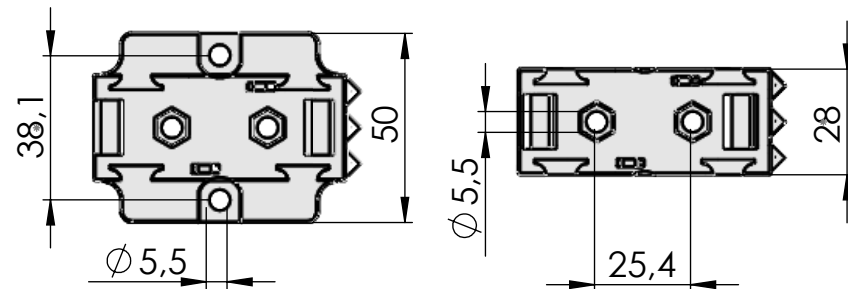


Examples of mounting possibilities, more variations are possible.

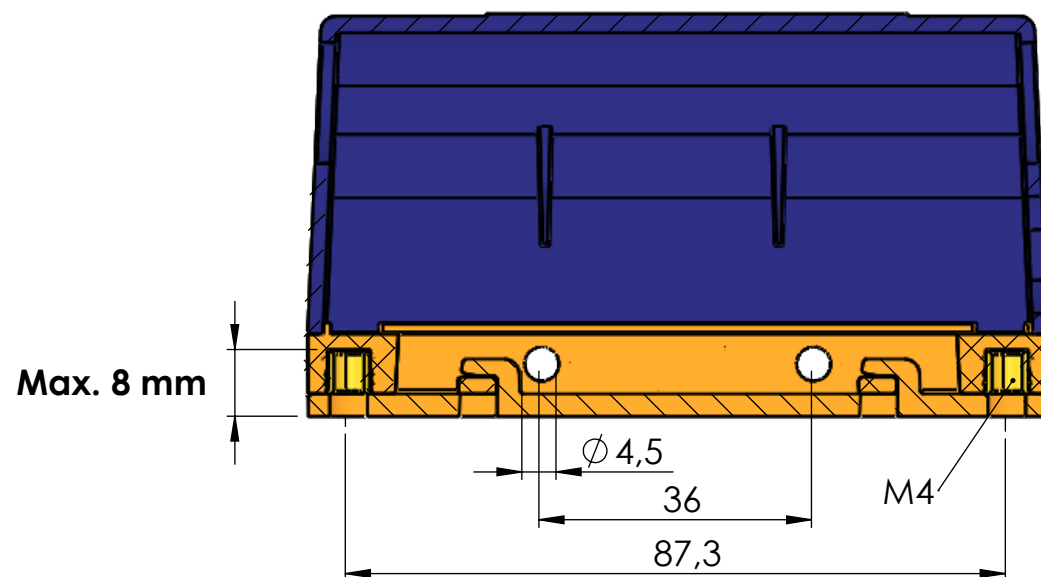


Mounting the Simco bracket

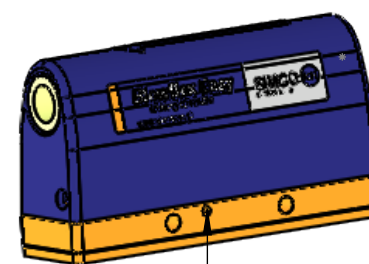





Loose the 2 set screws on both sides and remove the cover by sliding.

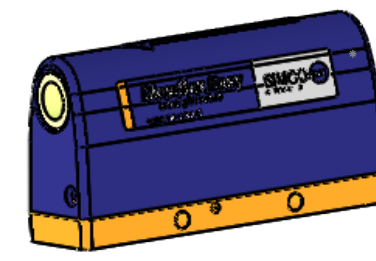

Attach the bracket and slide it in position.




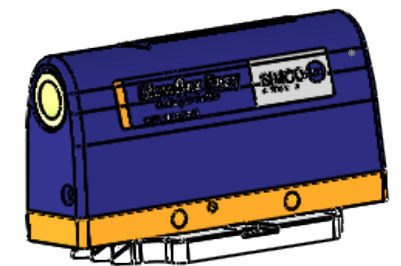


Fix the 2 set screws.

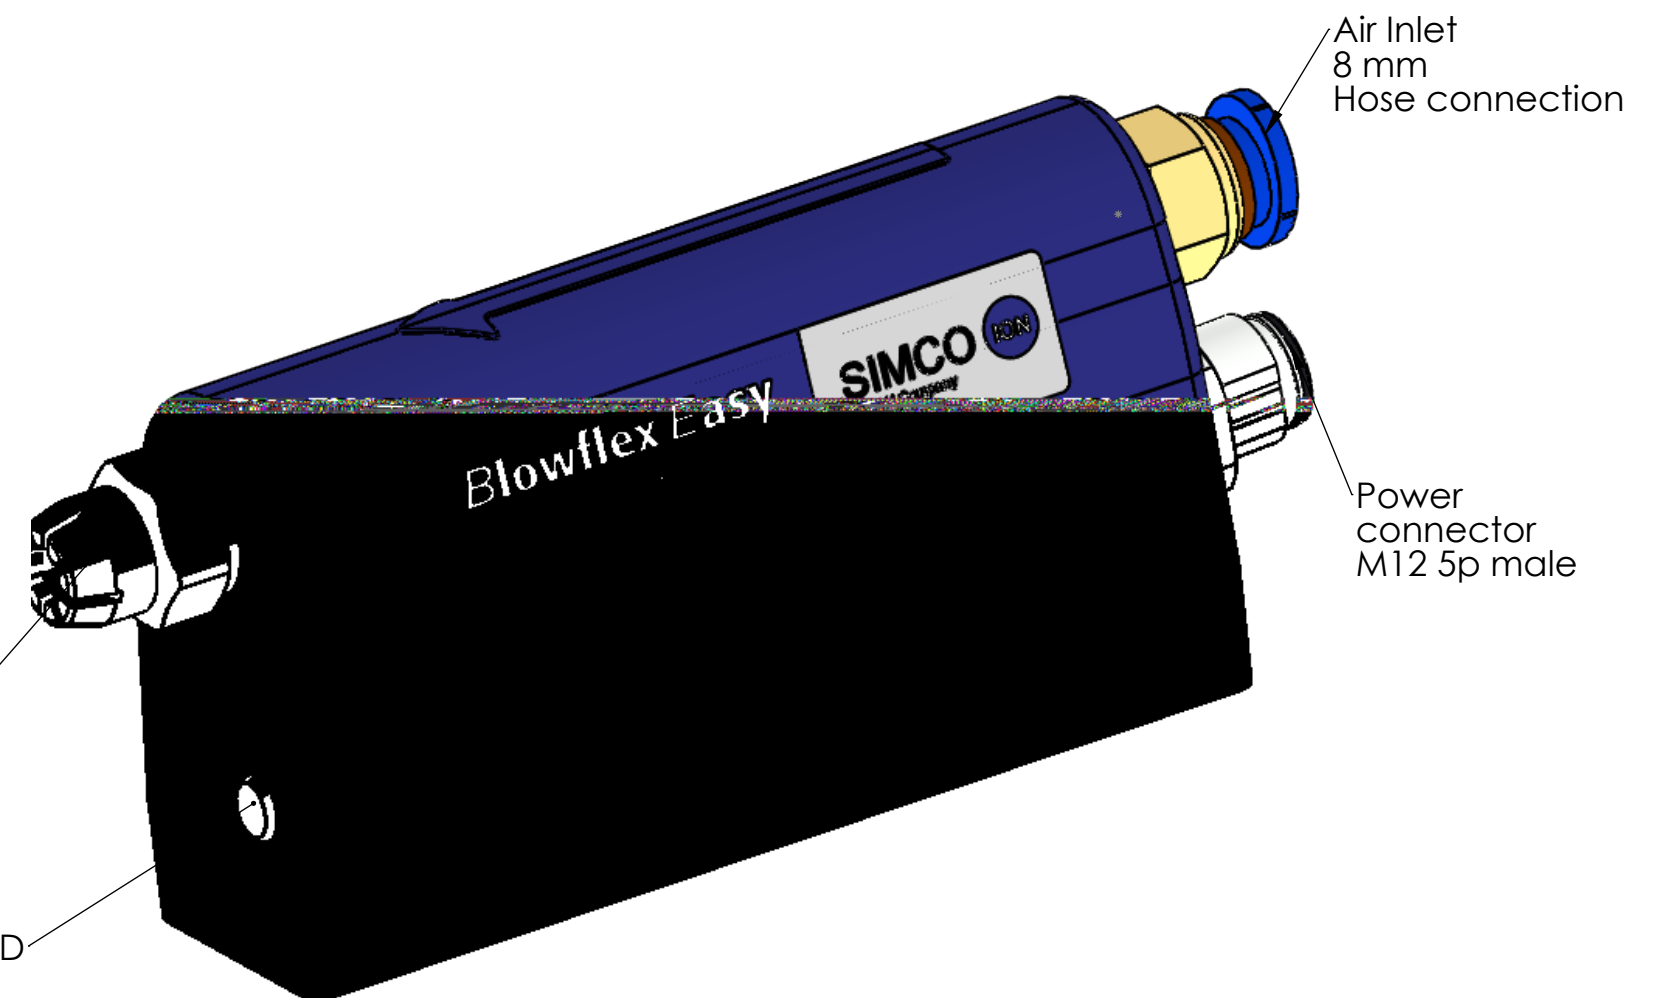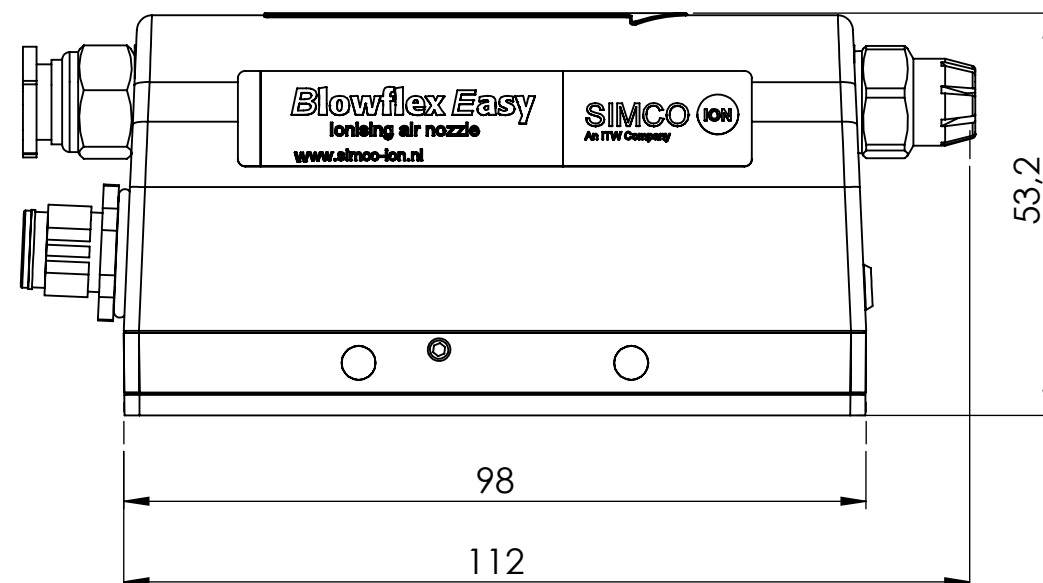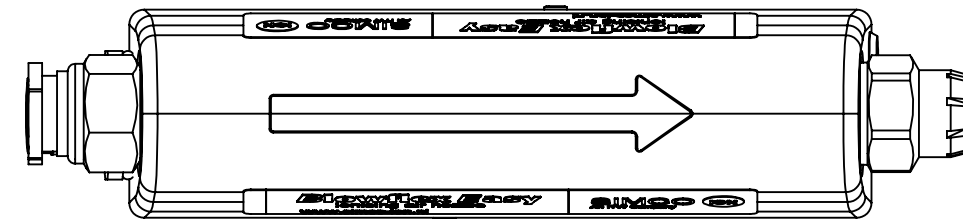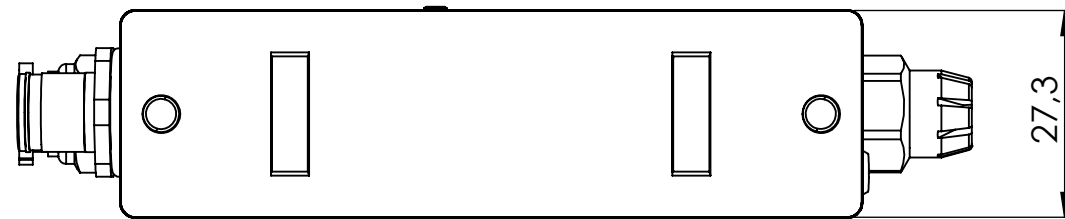


Drawing 16160010 shows all mounting variations of the Blowflex Easy.

Drawing 16160020 shows the power connection variations.

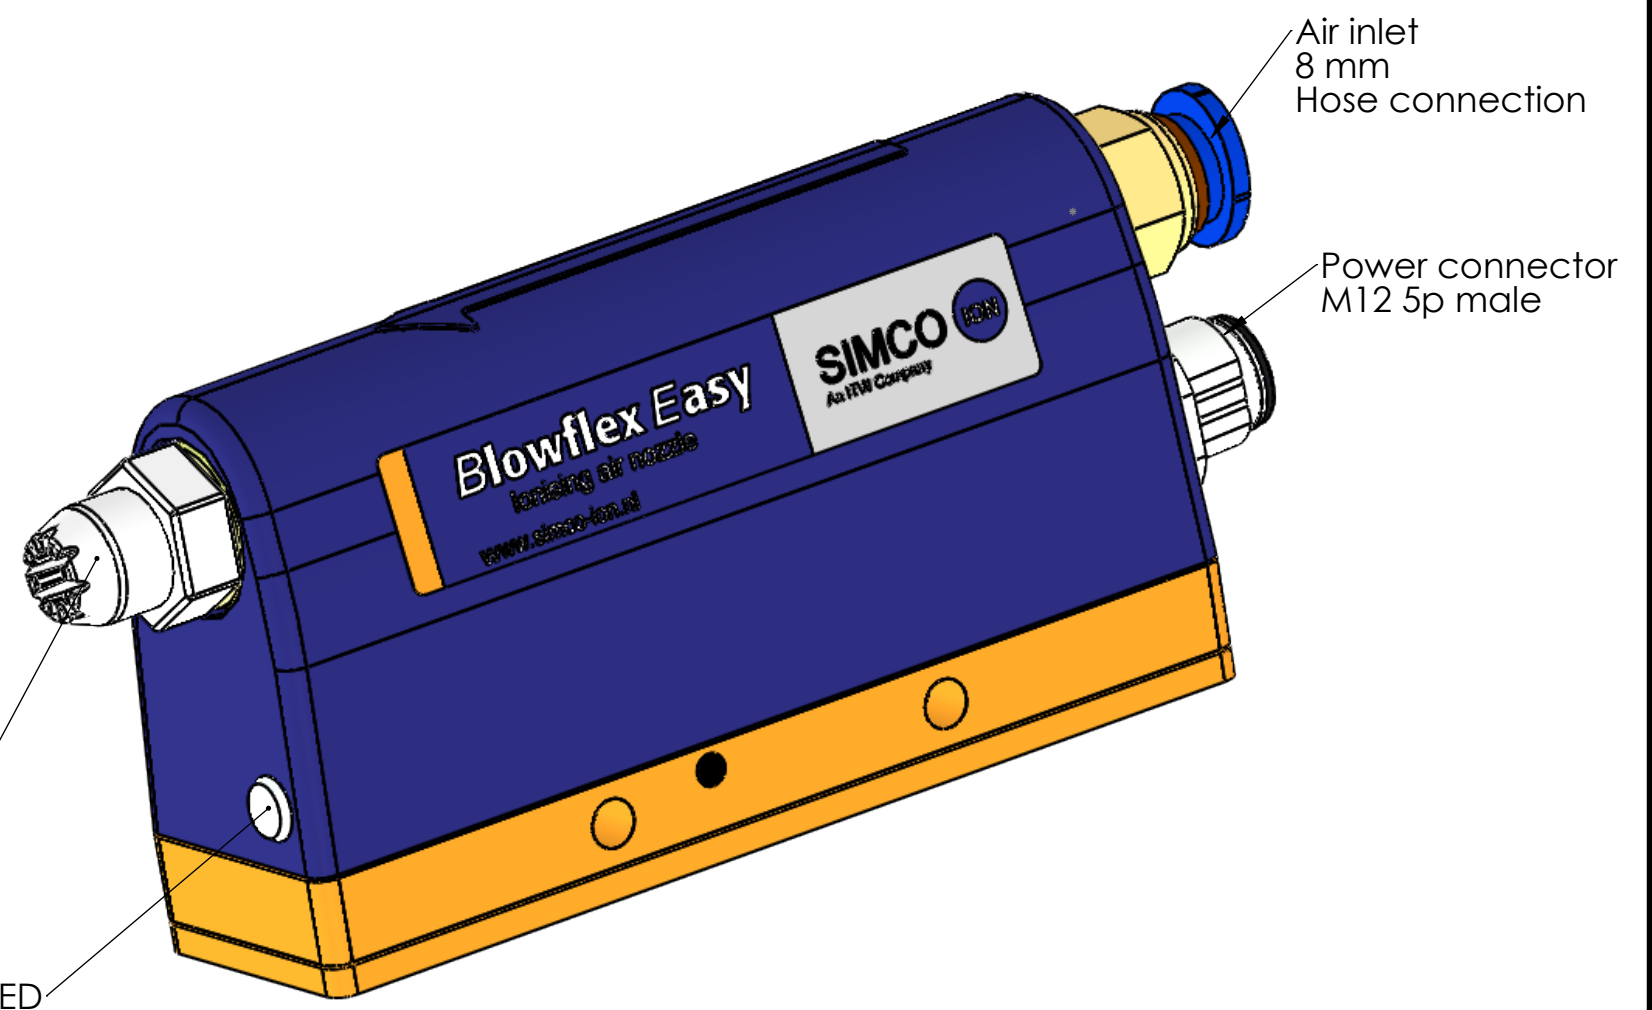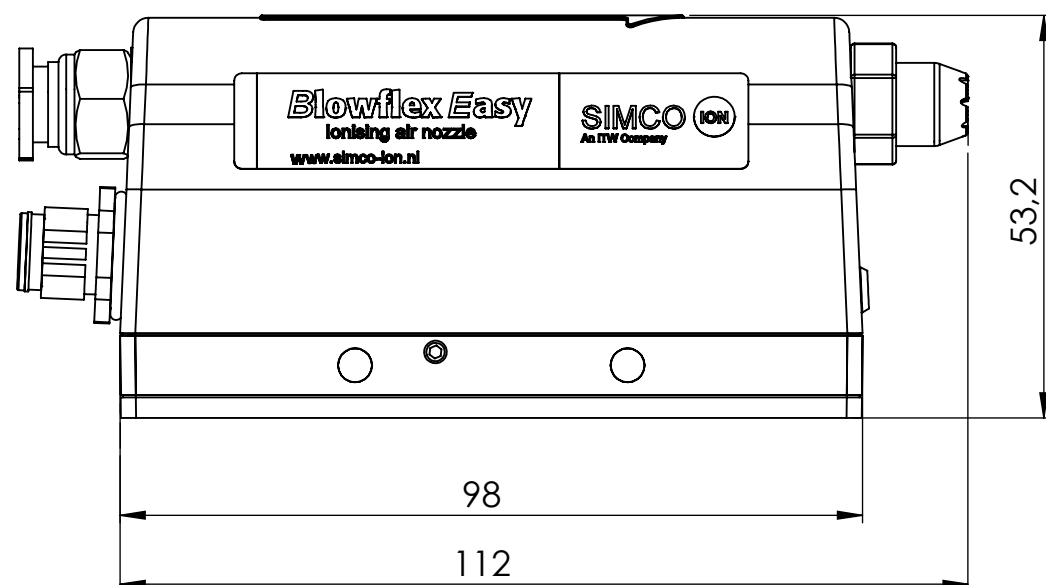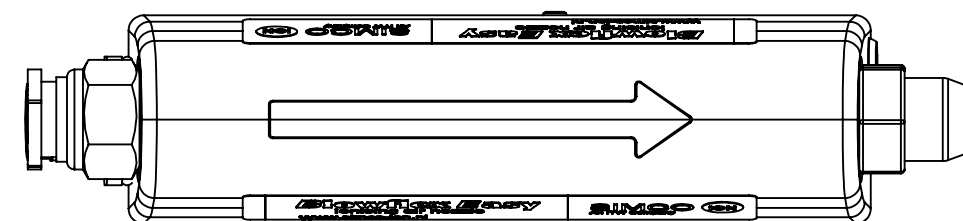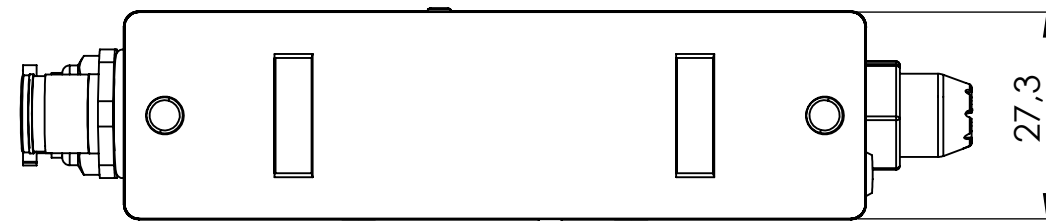

Drawing 16160010 shows all mounting variations of the Blowflex Easy.

Drawing 16160020 shows the power connection variations.

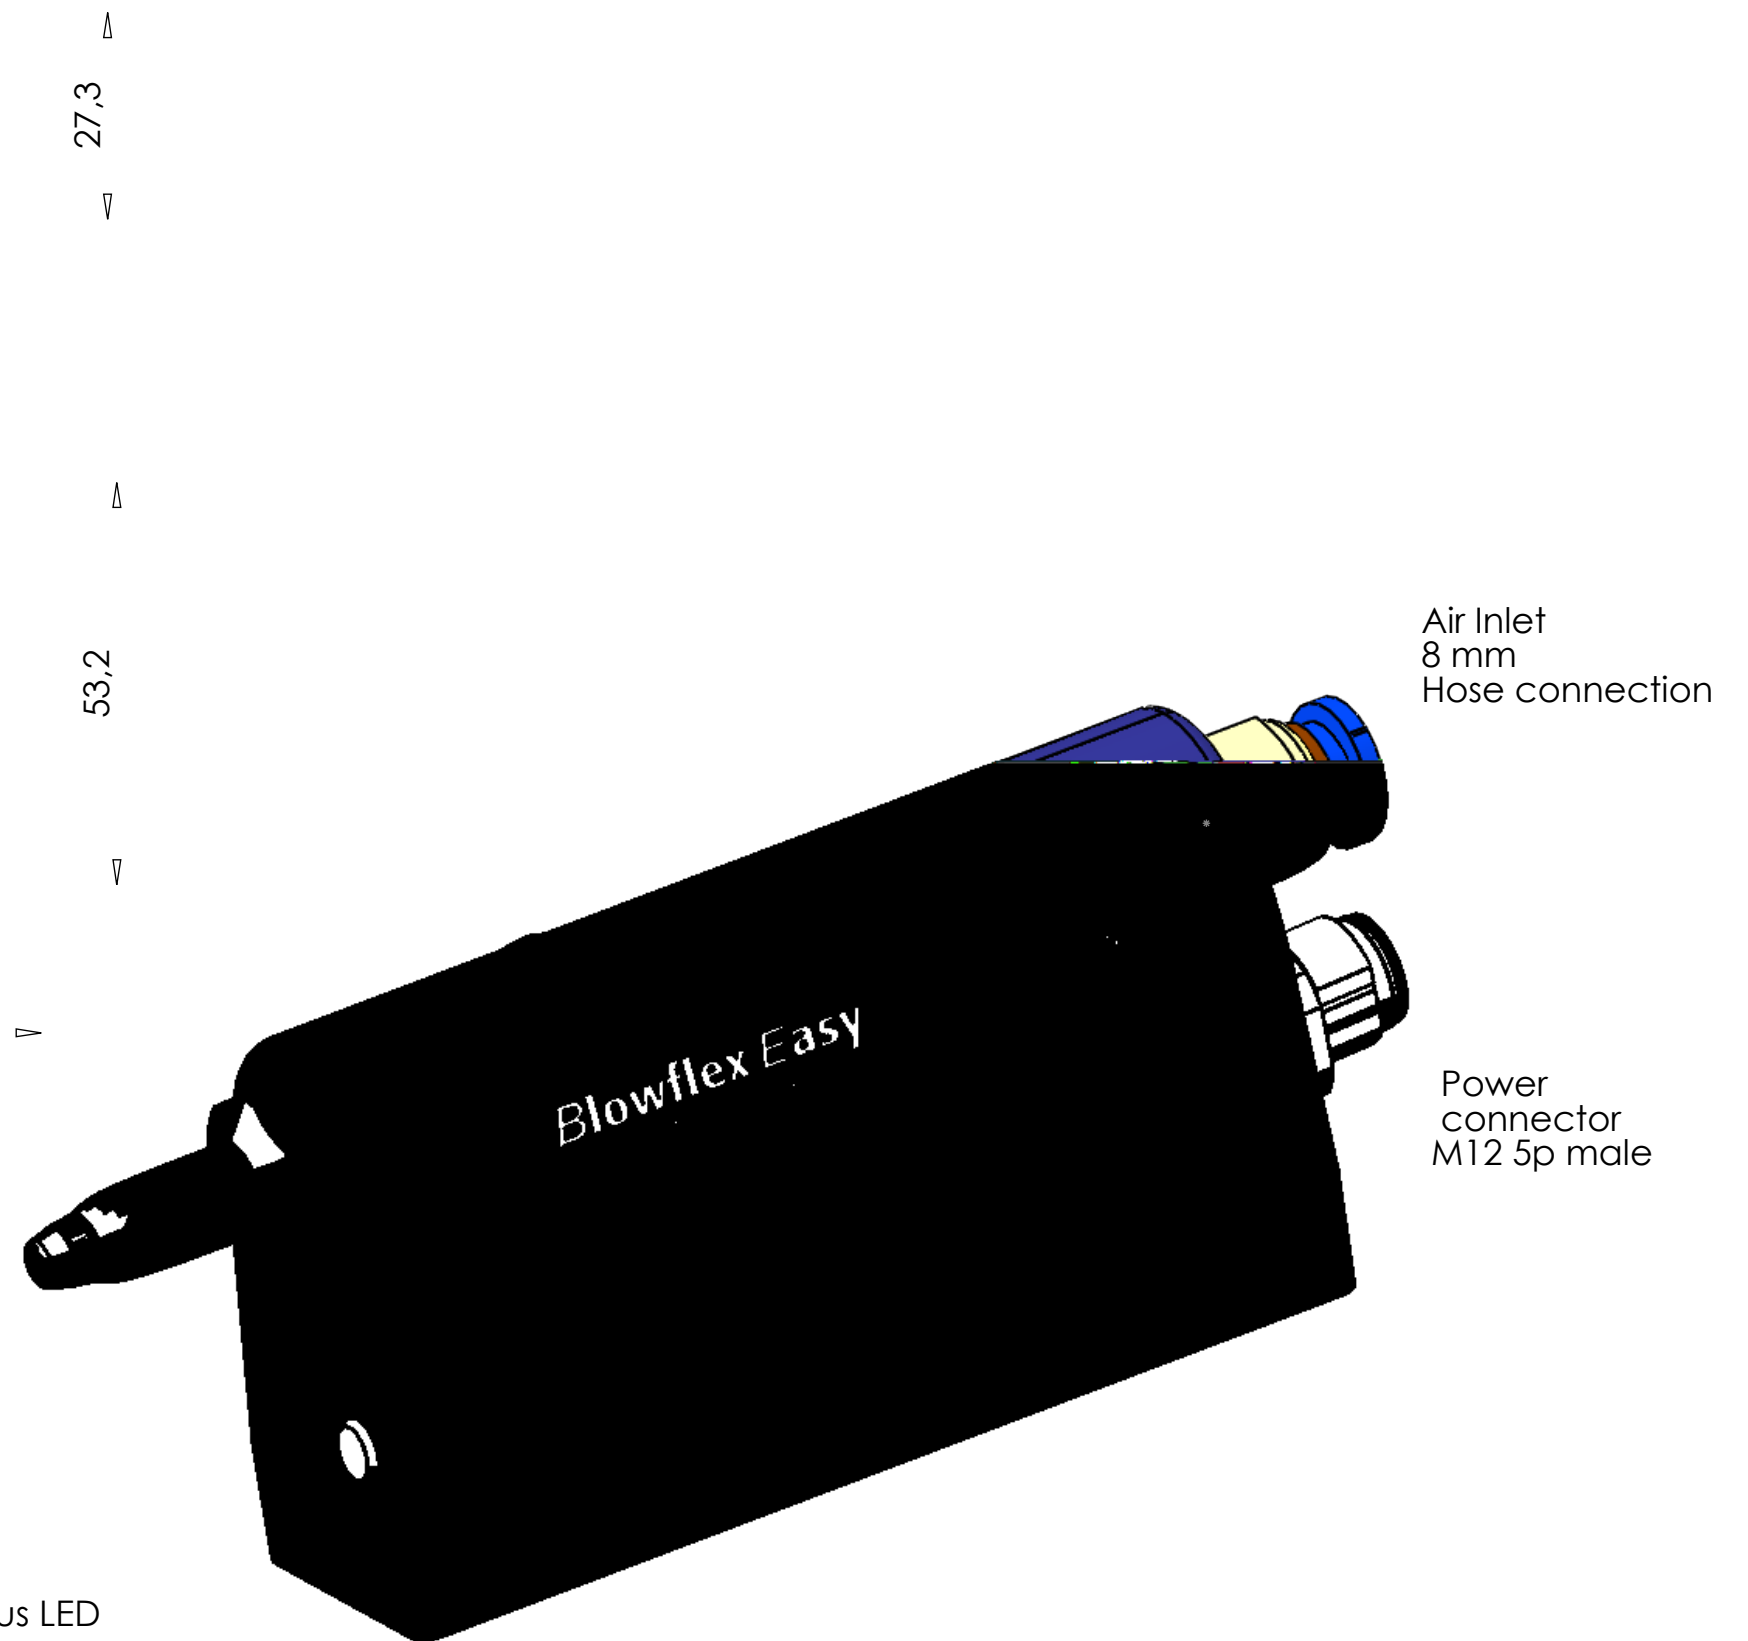

Drawing 16160010 shows all mounting variations of the Blowflex Easy.

Drawing 16160020 shows the power connection variations.

|                                                                                                                                 |  |                          |                  |    |        |                                                                                       |          |           |                      |     |   |
|---------------------------------------------------------------------------------------------------------------------------------|--|--------------------------|------------------|----|--------|---------------------------------------------------------------------------------------|----------|-----------|----------------------|-----|---|
| <div><div><div>SIMCO</div><div>ION</div></div><div>An ITW Company</div><div>WWW.SIMCO-ION.NL TEL: +31 (0)573 288333</div></div> |  | Name: Blowflex Easy Spot |                  |    |        |                                                                                       |          | Drawn: RJ | Part no.: 1616000006 |     |   |
| CAD GENERATED<br>NOT AUTO UPDATED                                                                                               |  | Dimensions<br>in mm      | Date: 29-12-2020 | A3 | M: 1:1 |  | ECN-1616 | Check: HS | Dwg. no.: 16160006/- | 1/1 | D |